SMC-TR-92-32

AEROSPACE REPORT NO.
TR-0091(6925-02)-2

AD-A258 666

Accurate Measurement of Signals Close to the Noise Floor on a Spectrum Analyzer

Prepared by

A. A. MOULTHROP and M. S. MUHA
Communications Systems Subdivision
Electronics and Sensors Division

DTIC
ELECTE
DEC 1 1992
S C D

30 September 1992

Prepared for

SPACE AND MISSILE SYSTEMS CENTER
AIR FORCE MATERIEL COMMAND
Los Angeles Air Force Base
P.O. Box 92960
Los Angeles, CA 90009-2960

Engineering and Technology Group

92-30414

THE AEROSPACE CORPORATION
El Segundo, California

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED

This report was submitted by The Aerospace Corporation, El Segundo, CA 90245-4691, under Contract No. F04701-88-C-0089 with the Space and Missile Systems Center, P. O. Box 92960, Los Angeles, CA 90009-2960. It was reviewed and approved for The Aerospace Corporation by J. M. Straus, Principal Director, Communications Systems Subdivision. James R. Goble, Capt, USAF, was the project officer for the Mission-Oriented Investigation and Experimentation (MOIE) program.

This report has been reviewed by the Public Affairs Office (PAS) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nationals.

This technical report has been reviewed and is approved for publication. Publication of this report does not constitute Air Force approval of the report's findings or conclusions. It is published only for the exchange and stimulation of ideas.

QUANG BUI, Lt, USAF
MOIE Program Manager

James R. Goble, Capt, USAF
DSCS Advanced Technology Manager

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSICATION Unclassified	1b. RESTRICTIVE MARKINGS
2a. SECURITY CLASSIFICATION AUTHORITY 2b. DECLASSIFICATION/DOWNGRADING SCHEDULE	3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution unlimited.
4. PERFORMING ORGANIZATION REPORT NUMBER(S) TR-0091(6925-02)-2	5. MONITORING ORGANIZATION REPORT NUMBER(S) SMC-TR-92-32
6a. NAME OF PERFORMING ORGANIZATION The Aerospace Corporation Communications Systems Subdivision 6b. OFFICE SYMBOL *(If applicable)*	7a. NAME OF MONITORING ORGANIZATION Space and Missile Systems Center
6c. ADDRESS *(City, State, and ZIP Code)* El Segundo, CA 90245	7b. ADDRESS *(City, State, and ZIP Code)* Los Angeles Air Force Base Los Angeles, CA 90009-2960
8a. NAME OF FUNDING/SPONSORING ORGANIZATION 8b. OFFICE SYMBOL *(If applicable)*	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER F04701-88-C-0089
8c. ADDRESS *(City, State, and ZIP Code)*	10. SOURCE OF FUNDING NUMBERS PROGRAM ELEMENT NO. / PROJECT NO. / TASK NO. / WORK UNIT ACCESSION NO.

11. TITLE *(Including Security Classification)*
Accurate Measurement of Signals Close to the Noise Floor on a Spectrum Analyzer

12. PERSONAL AUTHOR(S) Moulthrop, A. A.; Muha, M. S.

13a. TYPE OF REPORT	13b. TIME COVERED	14. DATE OF REPORT *(Year, Month, Day)*	15. PAGE COUNT
	FROM _____ TO _____	30 September 1992	17

16. SUPPLEMENTARY NOTATION

17. COSATI CODES			18. SUBJECT TERMS *(Continue on reverse if necessary and identify by block number)*
FIELD	GROUP	SUB-GROUP	Microwave measurements, Noise, Power measurements Spectrum analysis

18. ABSTRACT *(Continue on reverse if necessary and identify by block number)*

Because most spectrum analyzers are calibrated to read the true power of a sinusoidal signal, a correction factor is necessary to read the true power of a nonsinusoidal signal, such as noise. Consequently, when noise and a sine wave are both present, a correction factor that is a function of the signal-to-noise ratio is necessary to find the true signal power. For some spectrum analyzers the correction factor for pure noise is incorporated into the software, but the correction for signal plus noise is generally ignored. This report derives this correction factor, which is significant where the signal-to-noise ratio is near unity.

20. DISTRIBUTION/AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT. ☐ DTIC USERS	21. ABSTRACT SECURITY CLASSIFICATION Unclassified
22a. NAME OF RESPONSIBLE INDIVIDUAL	22b. TELEPHONE *(Include Area Code)* / 22c. OFFICE SYMBOL

DD FORM 1473, 84 MAR — 83 APR edition may be used until exhausted. All other editions are obsolete.

SECURITY CLASSIFICATION OF THIS PAGE
UNCLASSIFIED

Preface

The authors wish to acknowledge W. A. Johnson, A. M. Young, and M. T. Meyer for their valuable comments, and C. P. Silva for suggesting analytic solutions to the integrals used in the following analysis.

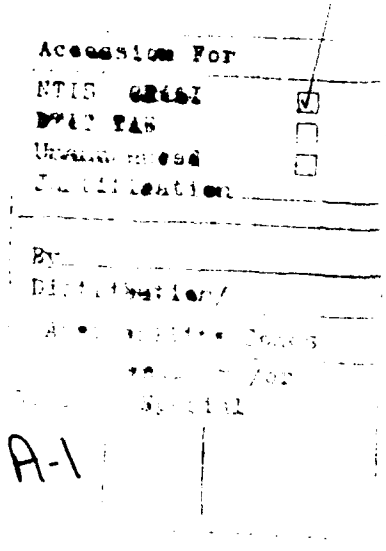

Contents

Preface 1

1.0 Introduction 5

2.0 Analysis and Experiment 7

2.1 Linear Mode 7
2.2 Logarithmic Mode 11

3.0 Conclusion 15

References 17

Figures

1. Block Diagram of the IF-Detector Portion of a Typical Spectrum Analyzer 8

2. Block Diagram of a Signal-plus-Noise Measurement System 9

3. The Effect of Noise on the Displayed Signal Voltage when a Spectrum Analyzer is in Linear Display Mode 11

4. The Effect of Noise on the Displayed Signal Power when a Spectrum Analyzer is in Logarithmic Display Mode..... 13

1.0 Introduction

Spectrum analyzers are commonly used to measure sinusoidal signals close to the noise floor of the measurement system. For example, measuring the third-order intercept of a small-signal amplifier requires an accurate determination of the amplitude of the third-order intermodulation products, which are usually close to the noise floor. In this case, the spectrum analyzer's internally generated distortion products, in addition to noise, can reduce the accuracy of the amplitude measurement. Since the internally generated distortion products have an unknown phase with respect to the desired signal, it is not generally possible to correct for these products; rather, one must avoid them entirely, by attenuating the input signal. In contrast, it is possible to correct for noise in the amplitude measurement, because noise causes a deterministic error. This error is deterministic because, although the noise amplitude fluctuates randomly, these fluctuations can be smoothed by using a narrow video filter or by video averaging. The signal peak can then be measured accurately; however, this power measurement includes both signal power and noise power.

One might try (naively) to correct for noise by subtracting the displayed noise power from the power of the displayed signal plus noise, but such a correction can result in a larger error than if the noise is simply ignored. This is because spectrum analyzers are normally calibrated to display the true power level of only *sinusoidal* signals, not that of Gaussian noise. However, to find the true signal amplitude when noise and a sinusoidal signal are both present, a correction factor must be applied that is a complicated function of the displayed signal-to-noise ratio. This correction, derived below, depends on the displayed signal-to-noise ratio, as well as on whether the spectrum analyzer's receiver uses a logarithmic or a linear amplifier.

2.0 Analysis and Experiment

A simplified block diagram[1] for the IF-detector portion of a typical spectrum analyzer is shown in Fig. 1. Either the log or linear amplifier is selected, depending on whether the spectrum analyzer is in the logarithmic or linear display mode, respectively. The amplitudes displayed on the spectrum analyzer are proportional to the output voltages of the low-pass filter. We are interested in the output voltage for a signal plus noise compared to that for noise alone and for the signal alone. To analyze this measurement, we construct a conceptual model that includes both a sinusoidal signal and a Gaussian noise source that is band-limited by the IF (resolution) filter. The sinusoidal signal has an amplitude A just before the envelope detector. The total noise power at the same point has the value N, which includes any noise generated in the spectrum analyzer. An experimental realization of this model is depicted schematically in Fig. 2. Below we derive the corrections for the linear and the logarithmic modes separately.

2.1 Linear Mode

For the Gaussian noise plus the signal of our model, it has been shown[2] that the probability density of the envelope is

$$p(E) = \frac{E}{N} \exp\left(-\frac{1}{2N}(A^2+E^2)\right) I_0\left(\frac{EA}{N}\right) \tag{1}$$

where E is the envelope voltage and $I_0(EA/N)$ is the modified Bessel function of the first kind and zeroth order. The output voltage of the low-pass filter following the envelope detector, if the cutoff frequency is low enough to remove all but the dc component, is the average value of the output voltage of the envelope detector:

$$\bar{E}_{lin}(N,m) = \int_0^\infty E\, p(E)\, dE = \frac{\sqrt{N}}{(2m)^{\frac{3}{2}}} \exp(-m) \int_0^\infty z^2 \exp\left(-\frac{z^2}{4m}\right) I_0(z)\, dz \tag{2}$$

We have changed the variables on the right-hand side of Eq. (2), using

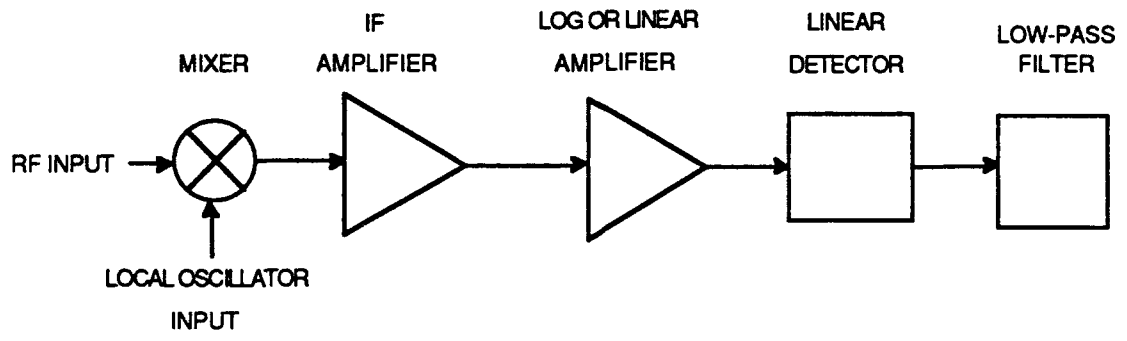

Fig. 1. Block Diagram of the IF-Detector Portion of a Typical Spectrum Analyzer

$$m = \frac{E^2}{2N} \qquad z = \sqrt{\frac{2m}{N}}E \tag{3}$$

to make the average envelope voltage E_{lin} a function of the noise power N and the signal-to-noise ratio m. The integration can be performed by writing $I_0(z)$ as an ascending series, so tha.

$$I_0(z) = \sum_{k=0}^{\infty} \frac{\left(\frac{1}{4}z^2\right)^k}{(k!)^2} \tag{4}$$

Putting Eq. (4) into Eq. (2) and carrying out the integration, we get

$$\bar{E}_{lin}(N,m) = \sqrt{\frac{N\pi}{2}}\exp(-m)\sum_{k=0}^{\infty}\left(\frac{m}{2}\right)^k \frac{[1\cdot 3\cdot 5\cdot \ldots\cdot (2k+1)]}{(k!)^2} \tag{5}$$

If there is no signal, but rather only noise of average power N, then Eq. (5) becomes

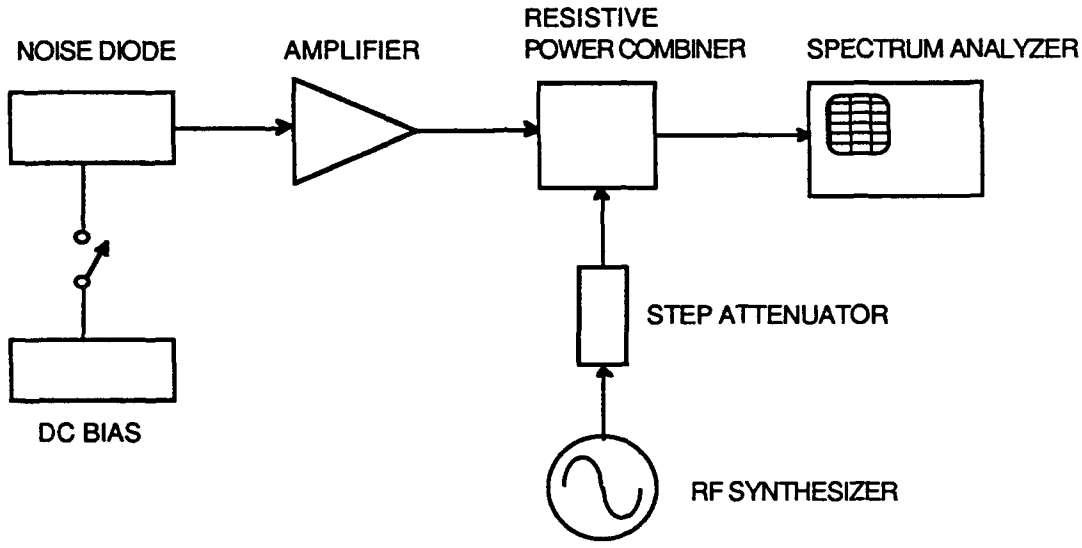

Fig. 2. Block Diagram of a Signal-plus-Noise Measurement System

$$\bar{E}_{lin}(N,0) = \sqrt{\frac{N\pi}{2}} \tag{6}$$

On the other hand, if there is no noise, but rather only a sinusoidal signal of average power N, then Eq. (5) becomes

$$\lim_{m\to\infty} \bar{E}_{lin}\left(\frac{N}{m},m\right) = \sqrt{2N} \tag{7}$$

Spectrum analyzers are calibrated to display the correct voltage for a sinusoidal signal. However, by dividing Eq. (7) by Eq. (6), we see that the ratio of the envelope voltage of noise to the envelope voltage of a sinusoidal signal having the same average power is

$$\sqrt{\frac{\pi}{4}} = -1.05 \text{ dB} \tag{8}$$

Hence, as a result of envelope detection, the voltage of noise alone as displayed on a spectrum analyzer operating in the linear mode will be 1.05 dB lower than the true noise voltage. The noise power per resolution bandwidth as displayed on a spectrum analyzer must also be corrected (in both the linear and logarithmic modes) to convert the power-transfer curve of the resolution filter to that of an ideal rectangular filter. Both of these corrections are discussed in greater detail elsewhere.[1]

In contrast, the correction to be applied when both signal and noise are present is described only briefly in Ref. 1. Two ratios are useful in discussing this correction. One is the ratio between (1) the voltage displayed at the signal frequency in the presence of both signal and noise to (2) the noise voltage displayed on the spectrum analyzer with no signal applied (m = 0):

$$R_{snn} \equiv \frac{\text{(displayed signal plus noise voltage)}}{\text{(displayed noise voltage)}} = \exp(-m) \sum_{k=0}^{\infty} \left(\frac{m}{2}\right)^k \frac{[1 \cdot 3 \cdot 5 \cdot \ldots \cdot (2k+1)]}{(k!)^2} \quad (9)$$

The other useful ratio is that of (1) the displayed signal-plus-noise voltage to (2) the displayed signal voltage with noise absent:

$$R_{sns} \equiv \frac{\text{(displayed signal plus noise voltage)}}{\text{(displayed signal voltage if noise is absent)}} = \sqrt{\frac{\pi}{4m}} \exp(-m) \times \sum_{k=0}^{\infty} \left(\frac{m}{2}\right)^k \frac{[1 \cdot 3 \cdot 5 \cdot \ldots \cdot (2k+1)]}{(k!)^2} \quad (10)$$

The displayed signal voltage with noise absent is also the true signal voltage. Hence R_{sns} is the ratio of (1) the displayed voltage at the signal frequency with noise present to (2) the true signal voltage one would measure in the absence of noise. Experimentally, one can measure R_{snn}, solve Eq. (9) for m, and then use that value for m to find R_{sns}. The displayed signal-plus-noise voltage is then divided by R_{sns} to give the true signal voltage. This procedure is simplified by plotting R_{sns} versus R_{snn}; this is done in Fig. 3, where a logarithmic scale is used. Figure 3 shows both the theoretical curve, obtained by plotting R_{sns} versus R_{snn}, and measured data, obtained by using a Hewlett-Packard 8566B spectrum analyzer in the experimental setup depicted in Fig. 2. To use

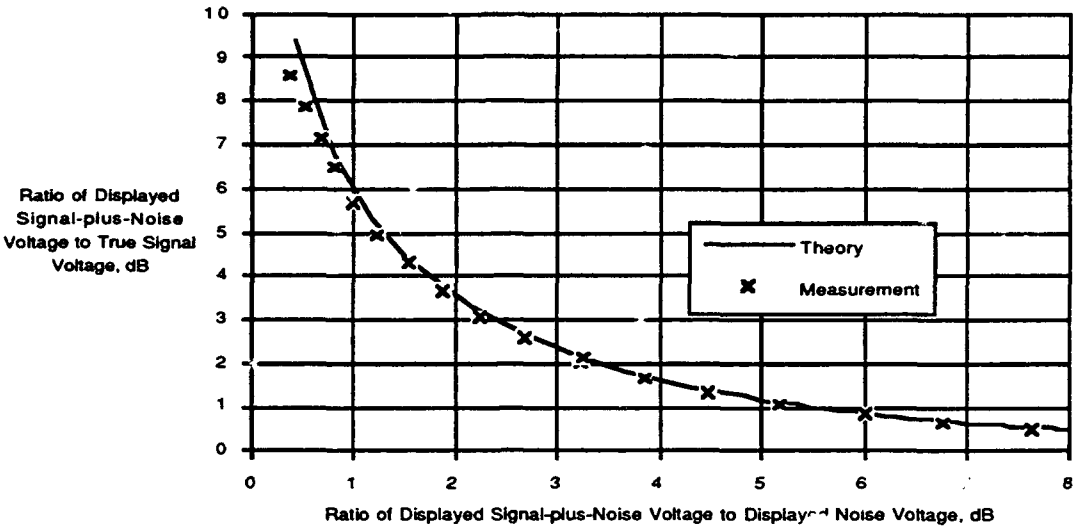

Fig. 3. The Effect of Noise on the Displayed Signal Voltage when a Spectrum Analyzer is in Linear Display Mode

Fig. 3, first find the ratio of displayed signal plus noise voltage to displayed noise voltage on the horizontal axis; the corresponding value on the vertical axis is the correction factor, which, when subtracted from the displayed signal-plus-noise voltage, yields the true signal voltage.

For example, say one measures a noise voltage of 100 μV and a signal-plus-noise voltage of 141 μV for a ratio of signal plus noise to noise of 3 dB. Figure 3 shows that the corresponding ratio of displayed signal-plus-noise voltage to true signal voltage is approximately 2.3 dB; hence, the true signal voltage is 2.3 dB below the measured signal-plus-noise voltage, or 108 μV. Note that this correction depends directly on the displayed noise voltage, which itself is a function of the true noise voltage, the resolution bandwidth, and the shape of the resolution filter. Therefore, to find the true signal voltage in the presence of noise, one need not be concerned with the true noise voltage or the characteristics of the resolution filter, but only with the displayed value of noise. Similarly, for the logarithmic mode (discussed below), the correction depends directly on the displayed noise power, so one need not be concerned with the true noise power or the characteristics of the resolution filter.

2.2 Logarithmic Mode

The correction to be applied when the spectrum analyzer is operating in the logarithmic mode can be derived by means of equations similar to those found above for operation in the linear mode.

For example, Eq. (1) is the same for the logarithmic mode as for the linear mode. Equation (2) is modified, however, because instead of averaging the output voltage of the envelope detector, we must average the output voltage of the log amplifier, which is the log of the envelope times G, the gain constant of the log amplifier; thus

$$\bar{E}_{log}(N,m) = G\int_0^\infty (\ln E)\, p(E)\, dE = \frac{G}{2m}\exp(-m)\int_0^\infty \left(\ln z + \frac{1}{2}\ln\frac{N}{2m}\right) z \exp\left(-\frac{z^2}{4m}\right) I_0(z)\, dz \quad (11)$$

Note that we are using the natural logarithm in Eq. (11), so that the constant G must be 8.68 to give a display in decibels. This integration can be performed by using the ascending series of Eq. (4) to arrive at

$$\bar{E}_{log}(N,m) = \frac{G}{2}\left(\ln 2N - \gamma + \exp(-m)\sum_{k=1}^{\infty}\frac{m^k}{k!}\left(1+\frac{1}{2}+\frac{1}{3}+\ldots+\frac{1}{k}\right)\right) \quad (12)$$

where $\gamma = 0.577216...$ is Euler's constant.

Using Eq. (12) for the log mode, we can find the ratio that corresponds to Eq.(8) for the linear mode. That is, the ratio of the displayed noise power to the displayed signal power for equal average power is $2/G\gamma = -2.507$ dB. Note that Eq. (12) is in decibels, so it is convenient to find the ratio in dB. Since a spectrum analyzer is calibrated to read the correct power for a sinusoidal signal, log amplification and envelope detection thus cause the average power of noise alone (as displayed on a spectrum analyzer operating in the logarithmic mode) to be 2.507 dB lower than the true noise power. This correction is described in greater detail elsewhere.[1]

Also using Eq. (12) for the log mode, we can find the ratios that correspond to R_{snn} and R_{sns} for the linear mode. In the log mode the ratio corresponding to R_{snn} is

$$\rho_{snn} \equiv \frac{\text{(displayed signal plus noise power)}}{\text{(displayed noise power)}} = \frac{G}{2}\exp(-m)\sum_{k=1}^{\infty}\frac{m^k}{k!}\left(1+\frac{1}{2}+\frac{1}{3}+\ldots+\frac{1}{k}\right) \quad (13)$$

Similarly, the ratio for the log mode corresponding to R_{sns} is

$$\rho_{sns} \equiv \frac{\text{(displayed signal plus noise power)}}{\text{(displayed signal power if noise is absent)}} =$$

$$\frac{G}{2}\left(-\ln m - \gamma + \exp(-m)\sum_{k=1}^{\infty}\frac{m^k}{k!}\left(1+\frac{1}{2}+\frac{1}{3}+\ldots+\frac{1}{k}\right)\right) \qquad (14)$$

A plot of ρ_{sns} versus ρ_{snn} is given in Fig. 4, along with measured data obtained on a Hewlett-Packard 8566B spectrum analyzer in the setup depicted in Fig. 2. As we did with Fig. 3 for the linear mode, we can use Fig. 4 for the logarithmic mode, as follows. First, find the measured ratio of displayed signal plus noise to displayed noise on the horizontal axis; the corresponding value on the vertical axis is the correction factor, which, when subtracted from the displayed signal-plus-noise power, yields the true signal power. For example, say one measures a noise power of -63 dBm and a signal-plus-noise power of -60 dBm for a ratio of signal plus noise to noise of 3 dB. Figure 4 shows that the corresponding ratio of displayed signal-plus-noise power to true signal

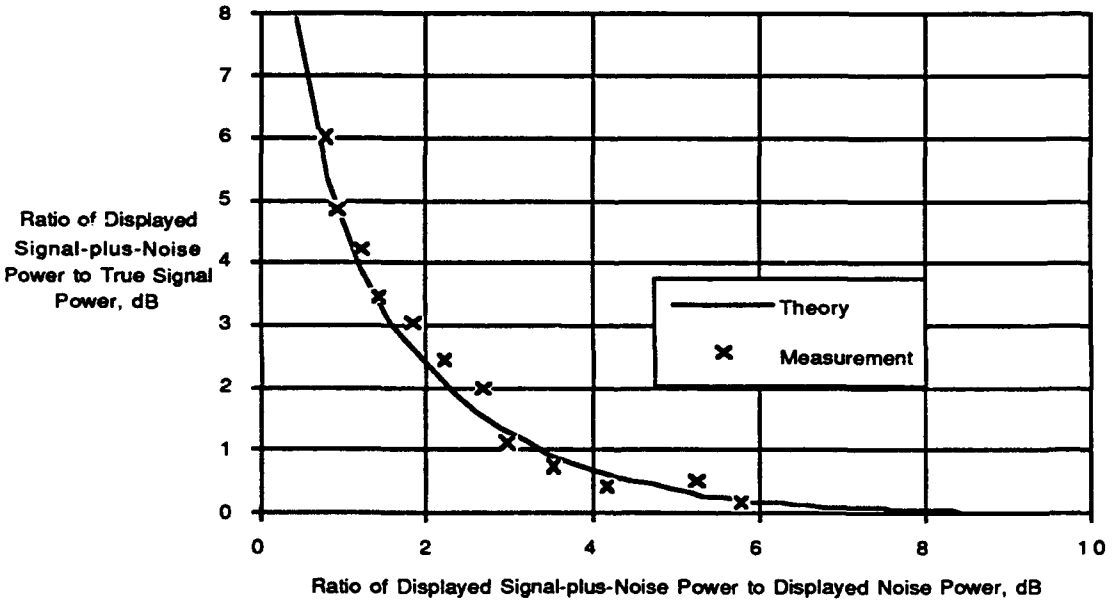

Fig. 4. The Effect of Noise on the Displayed Signal Power when a Spectrum Analyzer is in Logarithmic Display Mode

power is approximately 1.25 dB; hence the true signal voltage is 1.25 dB below the measured signal-plus-noise voltage, or -61.25 dBm.

3.0 Conclusion

A spectrum analyzer does not measure true power, but rather only the envelope of the voltage in the linear mode, or the log of the envelope of the voltage in the log mode. The corrections to be applied to arrive at the true signal power when noise is present are derived above. The corrections are shown graphically in Fig. 3 for the linear mode, and in Fig. 4 for the log mode. To use these graphs one finds the ratio of displayed signal plus noise to displayed noise on the horizontal scale; then the corresponding value on the vertical scale is the number of dB one must subtract from the displayed signal plus noise to arrive at the true signal level.

References

1. Blake Peterson, "Spectrum Analyzer Basics," Hewlett-Packard Application Note 150 (1989).

2. M. Schwartz, W. R. Bennett, and S. Stein, *Communication Systems and Techniques*, McGraw-Hill, New York (1966), p. 26.